
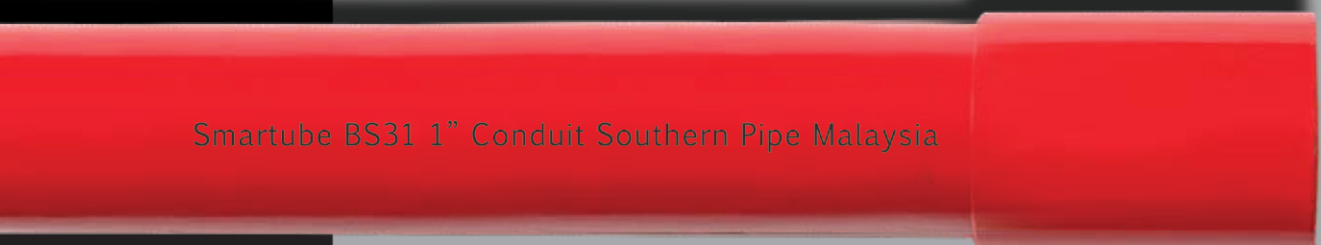


Smartube

A Product of Southern Pipe & Southern Steel Pipe Sdn. Bhd.

THE COLOURED GALVANISED STEEL CONDUIT TUBE

Smartube, Your Smarter Choice!

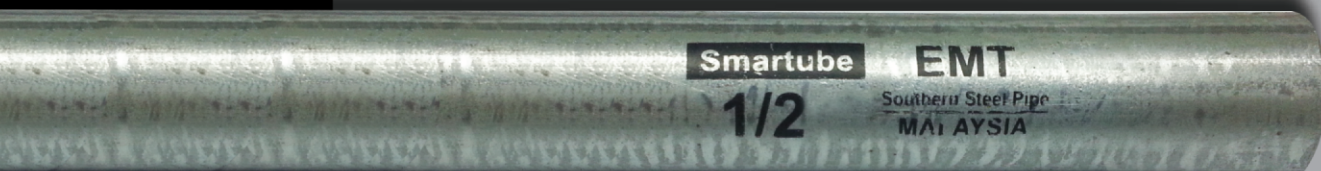

LEADING THE STEEL PIPE INDUSTRY



SOUTHERN STEEL PIPE SDN. BHD. can trace its roots back to 1967 with the establishment of its parent company Southern Pipe Industry (Malaysia) Sdn. Bhd. which was founded as a joint-venture between Malaysia and Japan.

Today, the pipe group consists of two steel pipe factories in Malaysia, with a combine annual sales revenue of over USD100 million and an annual capacity that exceeds 200,000mt.

The many certifications garnered through the years are testament to the companies' steadfast commitment in providing only the best products & services. Among others, it has the distinction of being the first steel mill in the country to be awarded the ISO 9001 :2000 certification. The group's product lines were being exported to countries all over the world.



BS 31:1940 Certificate
from SIRIM QAS



ISO 9001:2015 Certificate from
SIRIM QAS

CERTIFICATES




MS IEC 61386-21:2010 Certificate from SIRIM QAS




EMT Certificate from UL



ISO 9001:2015 Certificate from SIRIM QAS

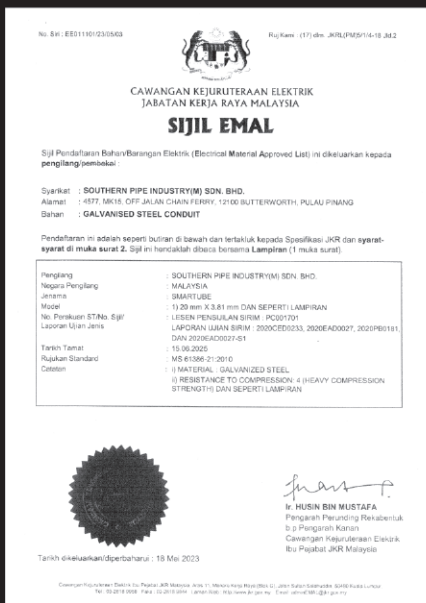

MS61386-21:2010 Certificate from JKR

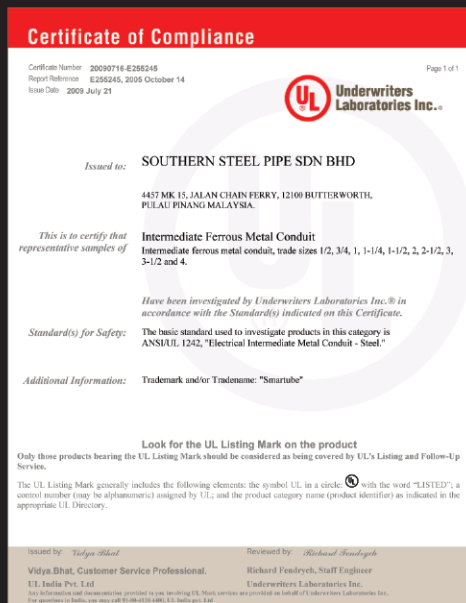

IMC Certificate from UL



MS61386-21:2010 Certificate from CIDB

SMARTUBE CONDUIT

(In-line hot-dip galvanized conduit)

Utilising the latest, state-of-the-art in-line hot-dip galvanizing process, Smartube offer top notch galvanised and coloured finishes. Smartube is easy to bend simultaneously providing a smooth wire-pulling feature.


FEATURES

(1) Easy wire pushing and pulling
The slip coat on the inside wall makes wire-pulling easy, and protects against damages.

(2) Advantages of colour conduits

- Saves time
- High quality finishing
- Save cost

CROSS-SECTIONAL VIEW OF SMARTUBE CONDUIT

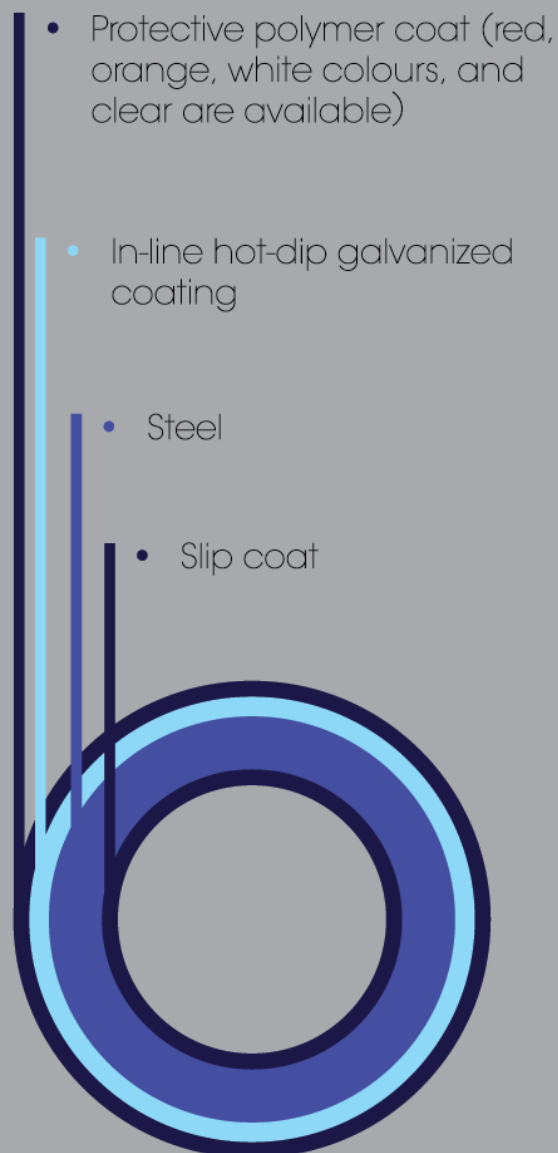

COLOURS



SMARTUBE RED

- Fire alarm & security system




SMARTUBE ORANGE

- Lighting & fibre optic system
- General system for machineries



SMARTUBE WHITE

- Blends well in light coloured areas
- PA System & IT System

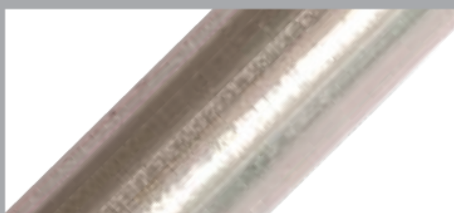

SMARTUBE CLEAR

- Standard for conventional applications

STANDARD & SPECIFICATIONS

Smartube conduit is manufactured conforming to the following standards:

- UL 797 (EMT)
- UL 1242 (IMC)
- BS 31
- BS 4568 / MS IEC 61386

EMT - ELECTRICAL METALLIC TUBING

UL797 UL LISTED FILE NO. E313230



Trade Size Designator		Nominal Outside Diameter		Nominal Wall Thickness		Unit Length		Nominal Weight	Nominal Wt. Per 100 Ft. (30.5M)		Quantity In	
											Primary Bundle	Master Bundle
in.	mm	in.	mm	in.	mm	m	ft	kg/pc	lb.	kg.	Pcs	Pcs
½	16	0.706	17.9	0.042	1.07	3.050	10	1.46	32.19	14.60	10	700
¾	21	0.922	23.4	0.049	1.25	3.050	10	2.21	48.72	22.10	10	500
1	27	1.163	29.5	0.057	1.45	3.050	10	3.08	67.90	30.80	10	300
1-1/4	35	1.510	38.4	0.065	1.65	3.050	10	4.74	104.50	47.40	5	200
1-1/2	41	1.740	44.2	0.065	1.65	3.050	10	5.49	121.03	54.90	5	150
2	53	2.197	55.8	0.065	1.65	3.050	10	6.99	154.10	69.90	3	120

IMC - INTERMEDIATE METAL CONDUIT

UL 1242 UL LISTED FILE NO. E255245



Trade Size Designator		Nominal Outside Diameter		Minimum Wall Thickness		Length Without Coupling		Nominal Weight	Nominal Wt. Per 100 Ft. (30.5M)		Quantity In	
											Primary Bundle	Master Bundle
in.	mm	in.	mm	in.	mm	m	ft and in.	kg/pc	lb.	kg.	Pcs	Pcs
½	16	0.815	20.7	0.070	1.79	3.030	9 11-1/4	2.81	62.00	28.10	10	350
¾	21	1.029	26.1	0.075	1.90	3.030	9 11-1/4	3.81	84.00	38.10	10	250
1	27	1.290	32.8	0.085	2.16	3.025	9 11	5.40	119.00	54.00	10	170
1-1/4	35	1.638	41.6	0.085	2.16	3.025	9 11	7.17	158.00	71.70	5	135
1-1/2	41	1.883	47.8	0.090	2.29	3.025	9 11	8.80	194.00	88.00	5	110
2	53	2.360	59.9	0.095	2.41	3.025	9 11	11.61	256.00	116.10	5	80
2-1/2	63	2.857	72.6	0.140	3.56	3.010	9 10-1/2	20.00	441.00	200.00	–	37
3	78	3.476	88.3	0.140	3.56	3.010	9 10-1/2	24.63	543.00	246.30	–	30
3-1/2	91	3.971	100.9	0.140	3.56	3.005	9 10-1/4	28.53	629.00	285.30	–	24
4	103	4.466	113.4	0.140	3.56	3.005	9 10-1/4	31.75	700.00	317.50	–	24

PLAIN CONDUIT (THREAD-LESS)

STANDARD JIS C 8305

Size	OD (mm)	Nominal Wall Thickness (mm)	Length (mm)	Weight (kg/pc)	Primary Bundle (pc/bdl)	Master Bundle (pc/bdl)
E 19	19.1	1.20	3660	1.94	10	400
E 25	25.4	1.20	3660	2.62	10	250
E 31	31.8	1.40	3660	3.84	7	175
E 39	38.1	1.40	3660	4.64	5	125
E 51	50.8	1.40	3660	6.24	3	75

BS31: 1940 THREADED CONDUIT HEAVY GAUGE CLASS B

Trade Size Designator		Nominal Outside Diameter		Nominal Wall Thickness		Unit Length	Nominal Weight			Quantity In	
in.	mm	in.	mm	in.	mm	m	kg/pc	kg/m	kg/ft	Primary Bundle	Master Bundle
										Pcs	Pcs
¾	19	0.745	18.9	0.063	1.6	3.05	2.14	0.70	0.21	10	50
						3.81	2.67				
1	25	0.993	25.2	0.063	1.6	3.05	2.90	0.95	0.29	10	50
						3.81	3.62				
1-1/4	32	1.245	31.6	0.063	1.6	3.05	3.66	1.20	0.37	5	25
						3.81	4.57				
1-1/2	38	1.493	37.9	0.071	1.8	3.05	5.00	1.64	0.50	5	25
						3.81	6.25				
2	50	1.992	50.6	0.080	2.0	3.05	7.44	2.44	0.74	3	15
						3.81	9.30				

MS IEC 61386-21 : 2010 RIGID STEEL CONDUIT FOR CABLE MANAGEMENT & BS 4568 : PART 1 : 1970 THREADED CONDUIT HEAVY GAUGE

Trade Size Designator		Nominal Outside Diameter		Nominal Wall Thickness		Unit Length	Nominal Weight			Quantity In	
mm	mm	mm	mm	mm	mm	m	kg/pc	kg/m	kg/ft	Primary Bundle	Master Bundle
										Bundle (Pcs)	Bundle (Pcs)
20	19.85	1.6				3.00	2.14	0.713	0.217	10	50
						3.75	2.67				
						3.81	2.72				
25	24.80	1.6				3.00	2.71	0.903	0.275	10	50
						3.75	3.39				
						3.81	3.44				
32	31.80	1.6				3.00	3.56	1.185	0.361	5	25
						3.75	4.44				
						3.81	4.51				

Note: Trade size 32mm only applicable for standard BS 4568

南
達



Southern Pipe

SOUTHERN PIPE INDUSTRY (MALAYSIA) SDN BHD (7451-M)
GST Reg. No. 002039480320

4577, Mk 15, Jalan Chain Ferry,
12100 Butterworth, Penang, MALAYSIA.

Tel: + (604) 331 4060

Fax: + (604) 323 4434

Website: www.southsteel.com

To place your order, kindly call:

Care has been taken to ensure that the content of this catalog is as accurate as possible. Southern Steel Pipe however does not accept any liability whatsoever for errors or for any information which is found to be misleading. The contents of this catalog may change from time to time without prior notice.